


# Tylö accessories & lighting

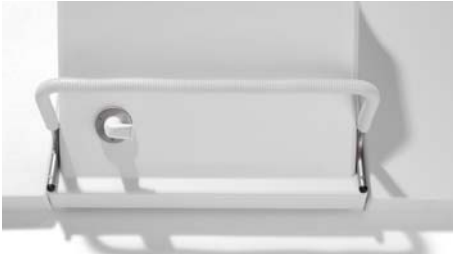

## Steam Guard W

(Art. no. 9002 9210)

For wall installation inside the steam room to protect bathers from the hot jet of steam. Recommended in all public facilities.

## Steam Guard 778

(Art. no. 9002 9220)

As above, but for 778 mm section in Tylö Elysée steam rooms.

## Steam Guard 588

(Art. no. 9002 9230)

As above, for 588 mm section.

## Steam Guard Corner

(Art. no. 9002 9240)

As above, for corner section. Lighting.



## Fiber Light

Halogen lighting for mood-inducing lighting in all sorts of settings. The lighting source is in a projector placed outside the sauna room. The length of the optical fibres determines the maximum distance between the projector and the light points.

### Fiber Light Standard

(Art. no. 9001 1100)

42 W with 6 light points (2 x 2 m, 2 x 2.5 m and 2 x 3 m).

### Fiber Light Public

(Art. no. 9001 1120)

42 W with gilded fittings and 8 light points (2 x 2.5 m, 3 x 3 m and 3 x 3.5 m).

### Fiber Light Colour S

(Art. no. 9001 1125)

75 W with 9 light points (1 x 0.5 m, 2 x 1 m, 3 x 1.6 m, 2 x 1.9 m, 1 x 2.3 m) and a rotating disc for fixed or changing colours.

### Fiber Light Colour

(Art. no. 9001 1130)

75 W, as above but with 9 light points on 2.5 m cables for large rooms.

### Transformer 12 V/210 W

(Art. no. 9090 1015)

200-240 V~/12 V max. 210 W. Can be connected to a 7 m lighting strip or 42 x 5 W lamps (Downlights).

### Transformer 12 V/60 W

(Art. no. 9090 1020)

As above, but for max. 60 W. Length 190 cm. 57 W output.

## Steam Outlet

(Art. no. 9002 9250)

Steam head with integral dispenser for Tylö fragrances. Connect to the steam generator's steam pipe.



## Fragrance dispensers Tylö Fresh

(Art. no. 9090 8005)

Fragrance dispenser for saunas, steam baths and wherever else Tylö's aromatic essences may be needed. Silent, automatic operation. Installation distance: max. 2 metres between fragrance dispenser and nozzle. Tip! Up to four fragrance dispensers can be connected to a single control panel for varying the fragrance in one or more rooms. Size: 350 x 200 mm.

## CC Fresh

(Art. no. 9090 8006)

Electronic control panel for easy, automatic operation of the Tylö Fresh dispenser. Supplied complete with transformer. Can be installed at any distance from the fragrance dispenser. Size: 130 x 190 mm, depth 27 mm.



## Tylö Fresh Basic

(Art. no. 9090 8007)

Same as Tylö Fresh above, but with transformer and simple on/off function to manually control fragrance intensity. Can also be connected to lighting or similar functions. Intended for private use.

## Lighting strips

### Lighting strip

Can be cut to size and installed under the benches in Excellent steam rooms. 12 V. Connect to our 12 V transformer. IP 24.



### Lighting strip 38

(Art. no. 9001 1190)

Length 38 cm. 12 W output.

### Lighting strip 90

(Art. no. 9001 1194)

Length 90 cm. 27 W output.

### Lighting strip 50

(Art. no. 9001 1192)

Length 50 cm. 15 W output.

### Lighting strip 190

(Art. no. 9001 1196)

Length 190 cm. 57 W output.

## Downlight

(Art. no. 9001 1081)

Effective spotlighting for recessed installation in the steam room. 12 V/5 W. Connect to 12 V transformer described below. Installation size: diameter 60 mm. IP 21.



## Loudspeaker A

(Art. no. 9080 2000)

Steam and heat-resistant materials suitable for recessed installation under the lower bench in the sauna. 50 W output. Installation size: diameter 120 mm, depth 55 mm. Supplied in pairs.

## Loudspeaker B

(Art. no. 9080 3000)

As above, 50 W, but for surface mounting. Size: 177 x 114, depth 125 mm. Supplied in pairs.

# Hygiene

## Descaling agent

### Solvent

(Art. no. 9090 3000)

Powder for descaling the water tank in Tylö Combi heaters and Tylö steam generators. Totally odourless and harmless.

### Solvent 50

(Art. no. 9090 3007)

As above, in large pack of 50.

### Solvent Sulfamic

(Art. no. 9090 3010)

An extremely effective descaling agent for professional use only in public facilities. Sold in 5 kg packs.

### Cleansing Kit

(Art. no. 9090 3020)

Removes calcium deposits on shower glass and glazed tiles. Always use the titanium wool ball with liberal amounts of water. Impregnating liquid to protect shower glass and glazed tiles against a build-up of lime deposits.

### Tylö Impregnator

(Art. no. 9090 3030)

Preserves and protects shower glass and glazed tiles. Spray on and rinse off with clean water.

### Disinfectant

(Art. no. 9002 9100)

For effective disinfecting of sauna rooms. Supplied in 5-litre plastic containers.

## Disinfectant

### Steam Clean

(Art. no. 9090 8020)

For automatic day-to-day hygiene and disinfection of steam rooms in hotels and public facilities. One hour after completion of the bathing cycle the entire room is automatically flushed with water. A ceiling-mounted sprinkler sprays disinfectant throughout the room and then repeatedly rinses it off with clean water. A security code function ensures that the disinfecting cycle cannot be started by mistake. Steam Clean is therefore the perfect cleaning system for all public facilities.



### Mould Remover 450 ml

(Art. no. 9090 3040)

Simply spray on to remove black mould spots quickly and effectively! This mould remover penetrates deep, killing bacteria and mould spores that thrive in the humidity of showers and bathrooms, and helps to inhibit regrowth. Ideal for tiles, joints, shower curtains, plastic matting, etc.

### MegaClean 150 ml

(Art. no. 9090 3050)

Kit containing bottle and cleaning sponge.

Tylö MegaClean leaves a sparkling result on washbasins, baths, taps, tiles and plastics (for example, bubble baths and steam baths). Tylö MegaClean's unique cleaning action is the result of a carefully balanced mix of cleaning agents and substances that protect surfaces. This makes it easier to remove grime and deposits that normal cleaning agents cannot. Tylö MegaClean is free from environmentally hazardous substances and adds a sparkle to all surfaces that can be washed in water.

